


Condom Box Vending Machine



Condom Box Vending Machine is an Automatic Self-Service Vending Machine used for dispensing Condom Box against acceptance of Coins. The Machine is configured to dispense one or two types of Condom Box through reliable motorized spiral mechanism.

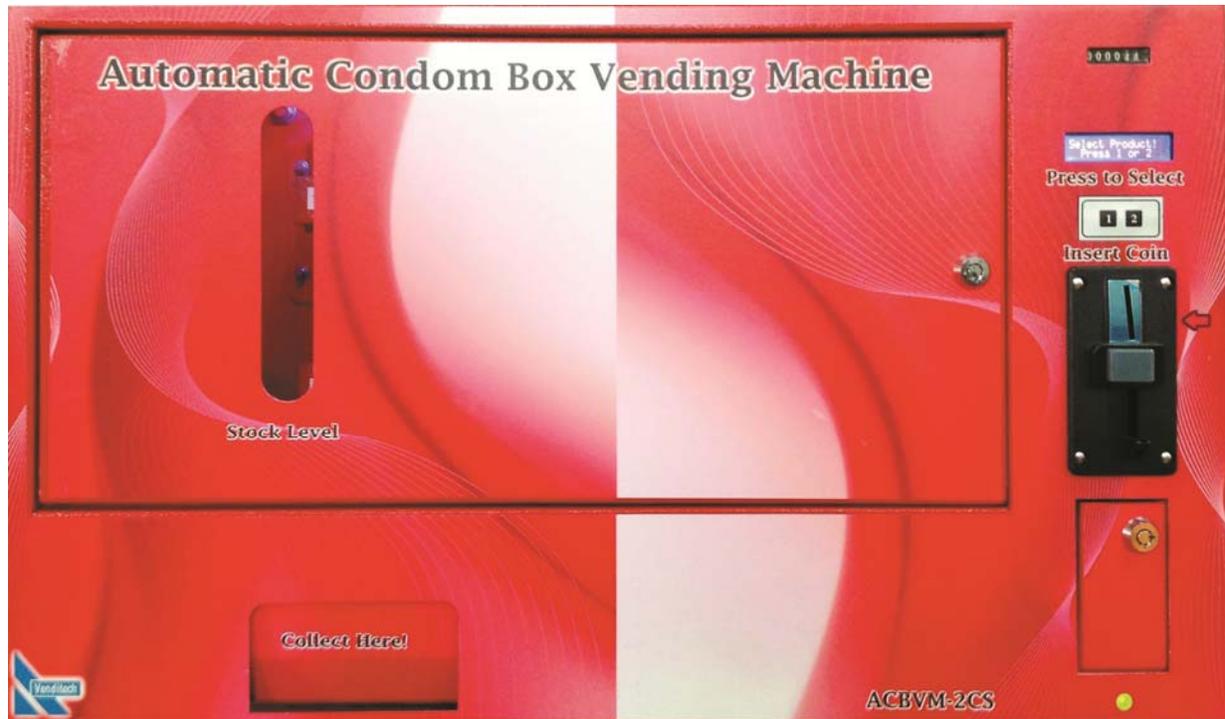

Operation:

- 2-Selection Keypad is provided for product selection.
- Upon selection of the product, Machine displays the selected product value and prompts the user to insert Coins one by one into the coin validator.
- Dispenses the selected product upon receipt of the exact value by any combination of Coins.
- Audible Buzzer provides beep sound alerts during transactions and a "Thank You" message is displayed at the end of each successful transaction.

Transaction Unit:

- Coin Validator to accept coins of all denomination with an acceptance speed of 3 Coins/Second.
- The Coin Validator accepts the coins through a single slot entry for multi-coin operation.
- This machine is configured with 2 Product selections in 2 Trays arrangement with support.
- Machine does not accept excess coins over the pre-set value of the Condom.
- The Standard Single Condom Box (3sachet Pack) holding capacity is 30 - 35 Numbers in this machine. The capacity depends on the size of the product.
- Configured with a six digit counter for sales auditing of number of Condom Box sold by machine.

Condom Box Vending Machine



User Interface:

- 2-Selection Keypad is provided for product selection. When configured for single selection operation, this keypad is disabled.
- In Single Selection Model, no keypad is available in the front panel.
- 2 line LCD with Blue backlight and white characters for better visibility and to display messages to the user like product selection, its price, transaction status and Stockout Condition.
- Single slot entry for inserting all denominations of coins one by one.

Controller Unit:

- Main Electronics Controller PCB incorporates the latest RISC Microcontroller technology.
- Industrial grade components are used in PCB to withstand temperatures up to 85 Degrees Centigrade. Compact design achieved with Surface mount electronic parts.
- Switch Mode Power Supplies (SMPS) are configured for soft start and stop operations.
- Battery Back-up with 12V, 7Ah battery during mains power failure and a built-in charger to charge the battery when mains on.
- Power Supply: 150V to 230V AC, 50Hz, 15W.

Special Features:

- Automatically stops accepting coins when there is no stock of Condom Box and displays "No Stock" in LCD
- Product price are settable on-site with protected access to settings mode.
- Inbuilt self-test function for the dispensing motors.
- Smart acceptance feature enables the user to pay the product value by several combinations of coins. No excess value is accepted.
- Built-in Battery Backup is available as standard.

Enclosure:

- 1.6 mm MS - Powder Coated Metal enclosure.
- Vinyl branding sticker.
- Tamper proof secure Locks with tubular keys. No keyholes.
- Separate lock and key for the Coin box.
- Dimensions: 430mm(H)x720mm (W)x230mm (D)
- Weight: 20Kgs (Approximately)

Ordering Information:

- **ACBVM-2CS:** Two Selection Automatic Condom Box Vending Machine with Electronic Coin Validator and selection keypad in front panel.
- **ACBVM-2C:** Single Selection Automatic Condom Box Vending Machine with Electronic Coin Validator without front panel selection keypad.
- Packed in Double Carton Boxes with thermocole for transportation.

Manufacturer



Future Techniks India Private Limited

W-564, Park Road, Anna Nagar West Extension,
Chennai-600101 India.

Tel : +91-44-26150522/26150523

Email : sales@futuretechniks.com

Website : www.futuretechniks.in

An ISO 9001:2008 Certified Company